

11 to 15 lb. Cans

Block Ice MAKER



**Built with features
that give you confidence
you've selected the best:**

- Stainless steel cabinet interior and exterior.
- CFC-free, foamed-in-place polyurethane insulation in all walls, top and bottom.
- Precharged CFC-free R404A, self-contained refrigeration system.
- Sealed 230 volt, 1/4 hp, 2.7 amp pump motor for solution circulation.
- 18-gauge stainless steel ice can sizes available:
11 lb. with seamless rounded corners, 12-1/2 lb.,
14 lb. and 15 lb. with welded corners.
- Block ice harvests up to every twelve hours.

Block Ice MAKER




OPTIONS

- Cabinet only.
- Remote refrigeration.
- Sealed 115 volt, 5.4 amp pump motor.

B-440

B-440

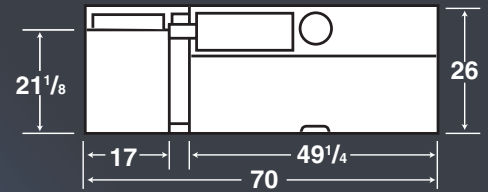


Top View



Front View

B-870

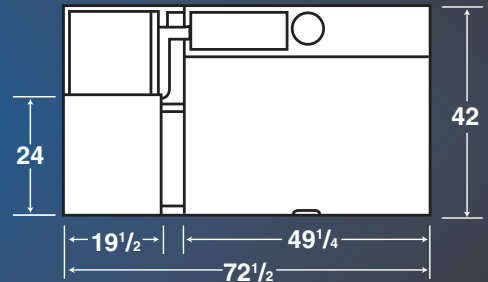

Top View



Front View

NOTE: Block Ice Makers are designed for use with propylene glycol freezing solution.

These models are designed for use when temperature and humidity are maintained at 75 degrees and 55 percent R.H. respectively.

Material and product improvement is a constant commitment at Leer Limited Partnership. These specifications are subject to change without notice and without incurring responsibility for previously sold block ice makers and components.

© LQA 00B
Printed in U.S.A.

Specifications

	① Can Dimensions				HP	Electrical			Weight ②	Outside Dimensions		
	11 lb. 5 1/4 x 5 1/4 x 15	12 1/2 lb. 8 x 4 1/4 x 14	14 lb. 5 1/2 x 5 1/2 x 15 1/4	15 lb. 8 x 5 1/4 x 14		VAC	HZ	AMP		Approx.	W	D
Models	Capacity											
B-440	21	19	21	14	3/4	230	60	12.5	480	70	26	37
B-870	41	34	41	29	3	230	60	16.3	560	72 1/2	42	37

- ① 11 lb. ice cans are  ② Crated weight with 14 lb. cans

Optional Harvest Tank

Dimensions:

31"L x 13-1/2"W x 27"H

Weight:

75 lbs. (crated)

Electrical:

240-1-60/11 amps

Construction:

Welded steel frame with stainless steel tank. Adjustable thermostat. Holds up to six cans.



Authorized Distribution By:



ITC - Ing-Tech Corporation
719-599-4044 800-599-4744 • Fax 719-599-4013

Web Site: www.itcpack.com